

4090 SERIES AND DETOC SERIES DETECTOR INSTALLATION AND WIRING

ENSURE THAT ALL POWER SOURCES ARE DISCONNECTED FROM THE CABINET END OF THE M913 CABLE BEFORE INSTALLATION OF THE DETECTORS.

INSTALLATION

The 4090/DETOC series detector is equipped with a 3/4" female NPT threaded base for mounting and an internal terminal block for wiring termination. Any mounting that is stable and allows the M913 detector cable to enter through base can be used.


The Strobecom II system and the 4090/DETOC detectors use electronic methods for range control. For maximum range setting flexibility the detectors should be mounted with the sight tube(s) parallel to the slope of the roadway approach.

Final tilt/swivel adjustments in each detector head alignment may be done via an adjustable ball joint. Loosen the ring holding the ball joint to adjust the direction of the detector. When the desired position is obtained, finger-tighten the ring holding the ball joint. **DO NOT** over-tighten or use a tool to tighten as this may damage the holding mechanism.

WIRING

Remove the 4 screws securing the top of the detector unit to gain access to the internal terminal block. Connect the orange, blue, yellow, and drain wires of the M913 detector cable per the label inside the detector. To insure proper operation, the bare drain wire must be connected to the proper connector inside the unit. The terminal block is equipped with wire clamping screws and no lugs or other connectors are necessary.

The 4090/DETOC series are fully protected from damage due to miswiring. However, system startup problems due to miswired heads can be difficult and expensive to troubleshoot. Double-check the wiring. Then secure the top of the 4090/DETOC to the base using the 4 screws removed earlier. **DO NOT** over-tighten the screws as the base may be damaged.

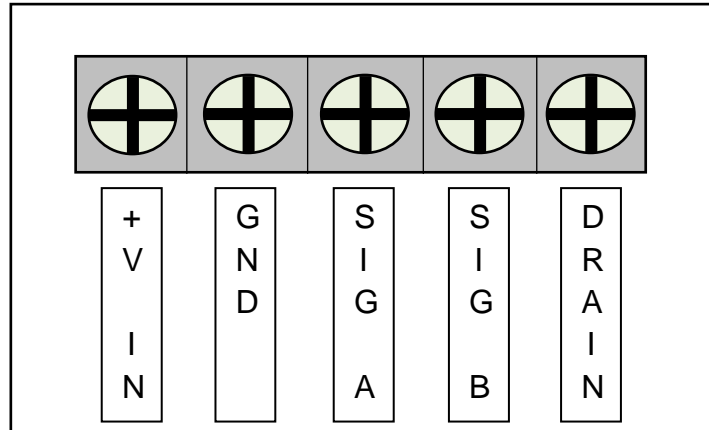

WIRING PER DETECTOR TYPE

2-direction, 2-channel
Two (2) cables


MODELS: (x = color A, B, G, R, W)

4090-22-SD	
4090-22-SD-CL-x	+V IN Orange (both cables)
4090-22-ST	GND Blue (both cables)
4090-22-ST-CL-x	SIG A Yellow (cable 1)
DETOC22	SIG B Yellow (cable 2)
DETOC22-CL-x	DRAIN Shield (both cables)

2-direction, 2-channel
Single (1) cable

MODELS: (x = color A, B, G, R, W)

4090-22-SD	
4090-22-SD-CL-x	+V IN Orange
4090-22-ST	GND Shield
4090-22-ST-CL-x	SIG A Yellow
DETOC22	SIG B Blue
DETOC22-CL-x	DRAIN No connection

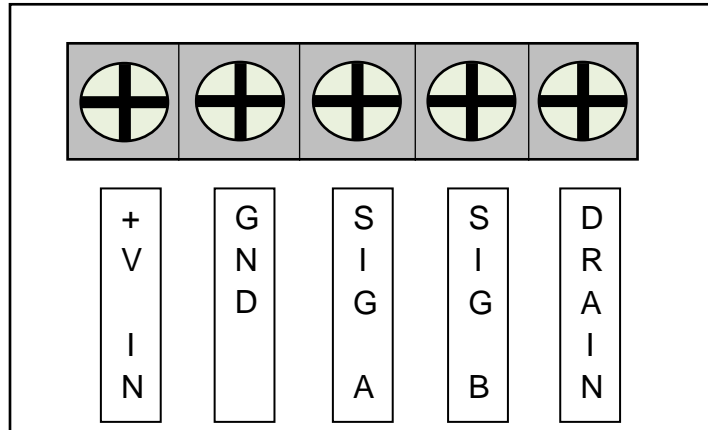

WIRING PER DETECTOR TYPE

**2-direction, 1-channel
 Single (1) cable**

MODELS: (x = color A, B, G, R, W)

4090-21-SD	
4090-21-SD-CL-x	+V IN Orange
4090-21-ST	GND Blue
4090-21-ST-CL-x	SIG A Yellow
DETOC21	SIG B No Connection
DETOC21-CL-x	DRAIN Shield

**1-direction, 1-channel
 Single (1) cable**

MODELS: (x = color A, B, G, R, W)

4090-1-SD	
4090-1-SD-CL-x	+V IN Orange
4090-1-ST	GND Blue
4090-1-ST-CL-x	SIG A Yellow
DETOC1	SIG B No connection
DETOC1-CL-x	DRAIN Shield