


930N-4004 FLASH PATTERN

LIGHTBAR LAMP CONFIGURATION

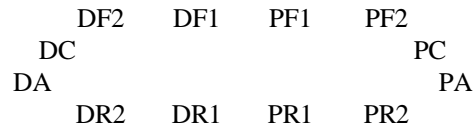

MODE	CONTROL WIRES ACTIVATED	LAMP OPERATION	
		REAR / ALLEY STROBES	FRONT / CORNER STROBES
0	NONE	NONE	NONE
1	ORG	DR1 ALTERNATES WITH PR1	NONE
2	ORG & BLU	DR2, PR2 & DA SIMULTANEOUS AND ALTERNATE WITH DR1, PR1 & PA SIMULTANEOUS	DF1 & PF1 SIMULTANEOUS AND ALTERNATE WITH DF2 & PF2 SIMULTANEOUS
3	ORG & BLU & WHT/BLK	SAME AS MODE 2	DF1 & PF1 SIMULTANEOUS AND ALTERNATE WITH DF2 & PF2 SIMULTANEOUS (6 PULSES PER BURST) DC ALTERNATES WITH PC (3 PULSES PER BURST)
RIGHT ARROW	BLU	DR2, DR2 & DR1, DR1 & PR1, PR1 & PR2, PR2, DA & PA, REPEAT	SAME AS MODE 2
LEFT ARROW	WHT/BLK	PR2, PR2 & PR1, PR1 & DR1, DR1 & DR2, DR2, DA & PA, REPEAT	SAME AS MODE 2
CENTER OUT	BLU & WHT/BLK	DR1 & PR1, DR2 & DR1 & PR1 & PR2, DR2 & PR2, DA & PA, REPEAT	SAME AS MODE 2

CONTROL WIRES FOR OPTIONAL HALOGENS

CONTROL WIRE ACTIVATED

RED/WHITE
BROWN
GRAY
YELLOW

HALOGEN LAMP

DR1 & PR1 (REAR WORK)
DF1 & PF1 (TAKEDOWN)
DA (DRIVER ALLEY)
PA (PASSENGER ALLEY)

**NOTE: GREEN control wire activates high intensity to strobes.
Apply +12vdc to appropriate control wire to activate desired function.
Cut loop (22 AWG BLACK) on 930F (FRONT power supply) to disable FRONT strobes during traffic direction modes.**