


# 930N-5606-0076 FLASH PATTERN

## LIGHTBAR LAMP CONFIGURATION

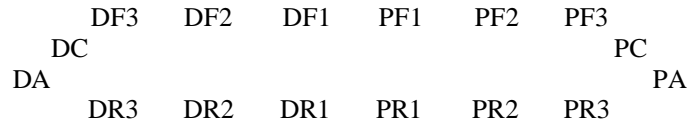

MODE	CONTROL WIRES ACTIVATED	LAMP OPERATION	
		REAR / ALLEY STROBES	FRONT / CORNER STROBES
0	NONE	NONE	NONE
1 (FRONT & ALLEY)	ORG	DA ALTERNATES WITH PA	DF3 & PF3 SIMULTANEOUS AND ALTERNATE WITH DF2 & PF2 SIMULTANEOUS (6 PULSES PER BURST) DF1 ALTERNATES WITH PF1 (3 PULSES PER BURST) DC ALTERNATES WITH PC (3 PULSES PER BURST)
2 (REAR ONLY)	ORG & BLU	DR3 & PR3 SIMULTANEOUS AND ALTERNATE WITH DR2 & PR2 SIMULTANEOUS (6 PULSES PER BURST) DR1 ALTERNATES WITH PR1 (3 PULSES PER BURST) DA ALTERNATES WITH PA (3 PULSES PER BURST)	NONE
3 (360 +)	ORG & BLU & WHT/BLK	SAME AS MODE 2	SAME AS MODE 1
RIGHT ARROW	BLU	DR3, DR3 & DR2, DR2 & DR1 & PR1, DR1 & PR1 & PR2, PR2 & PR3, PR3, DA & PA, REPEAT	SAME AS MODE 1
LEFT ARROW	WHT/BLK	PR3, PR3 & PR2, PR2 & PR1 & DR1, PR1 & DR1 & DR2, DR2 & DR3, DR3, DA & PA, REPEAT	SAME AS MODE 1
CENTER OUT	BLU & WHT/BLK	DR1 & PR1, DR2 & DR1 & PR1 & PR2, DR3 & DR2 & PR2 & PR3, DR3 & PR3, DA & PA, REPEAT	SAME AS MODE 1

## CONTROL WIRES FOR OPTIONAL HALOGENS

CONTROL WIRE ACTIVATED	HALOGEN LAMP
GRAY	DA (DRIVER ALLEY)
YELLOW	PA (PASSENGER ALLEY)
BROWN	DF1 & PF1 (HS SPLIT TAKEDOWN)
RED/WHT	DR1 & PR1 (HS SPLIT REAR WORK)

**NOTE: GREEN control wire activates high intensity to strobes.**  
**Apply +12vdc to appropriate control wire to activate desired function.**  
**To disable FRONT strobes during traffic direction modes (modes 4, 5 & 6) cut BLACK LOOP (22AWG) on FRONT power supply.**