


930N1-5606-PS03 FLASH PATTERN

LIGHTBAR LAMP CONFIGURATION

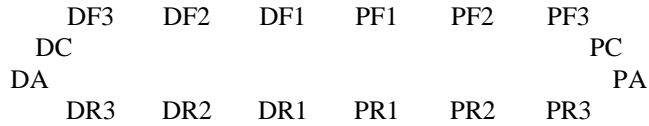

MODE	CONTROL WIRES ACTIVATED	LAMP OPERATION	
		FRONT / CORNER / ALLEY STROBES	FRONT / ALLEY HALOGENS
0	NONE	NONE	NONE
1	ORANGE & BLUE (CLEARING THE RIGHT OF WAY)	DF2 & PF2 SIMULTANEOUS AND ALTERNATE WITH DF3 & PF3 SIMULTANEOUS (6 PULSES PER BURST) DC ALTERNATES WITH PC (3 PULSES PER BURST) DA ALTERNATES WITH PA (3 PULSES PER BURST)	DF1 ALTERNATES WITH PF1 DA ALTERNATES WITH PA
2	BLUE (BLOCKING THE RIGHT OF WAY)	DF2 & PF2 SIMULTANEOUS AND ALTERNATE WITH DF3 & PF3 SIMULTANEOUS (6 PULSES PER BURST) DC ALTERNATES WITH PC (3 PULSES PER BURST) DA ALTERNATES WITH PA (3 PULSES PER BURST)	DA ALTERNATES WITH PA

OPTIONAL PREEMPTION

FRONT STROBES WILL OPERATE IN HIGH OR LOW PRIORITY PREEMPTION ONLY WHEN THE LIGHTBAR IS OPERATED IN THE "CLEARING THE RIGHT OF WAY" MODE. HIGH OR LOW PRIORITY PREEMPTION MUST BE SPECIFIED AT TIME OF ORDER FOR FACTORY INSTALLATION.

NOTE:

1. **The 930N-5606-PS03 Light Bar is factory wired for High Intensity operation to meet NFPA specifications.**
2. **Apply +12vdc to appropriate control wire to activate desired function.**