


# RECT25

LOW-PROFILE LED SERIES  
WITH PROGRAMMABLE INTERNAL FLASHER

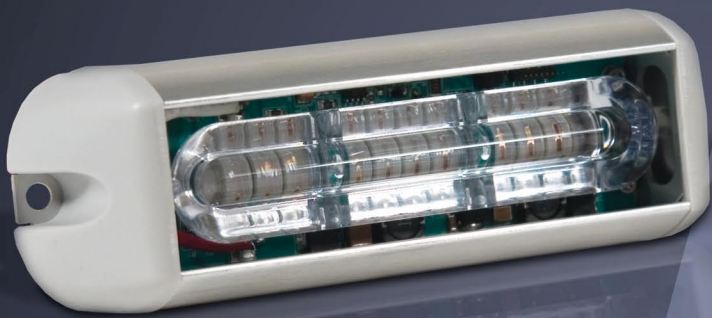


- High efficiency TIR technology
  - Super-wide angle for superior off-axis visibility
  - 11 Flash rates
    - Standard flange or optional rail mount
    - Available in amber, blue, red and white
    - Internal/external mounting

# RECT25

LOW-PROFILE LED SERIES  
WITH PROGRAMMABLE INTERNAL FLASHER

**iLED**<sup>TM</sup>  
Intelligent LED Series

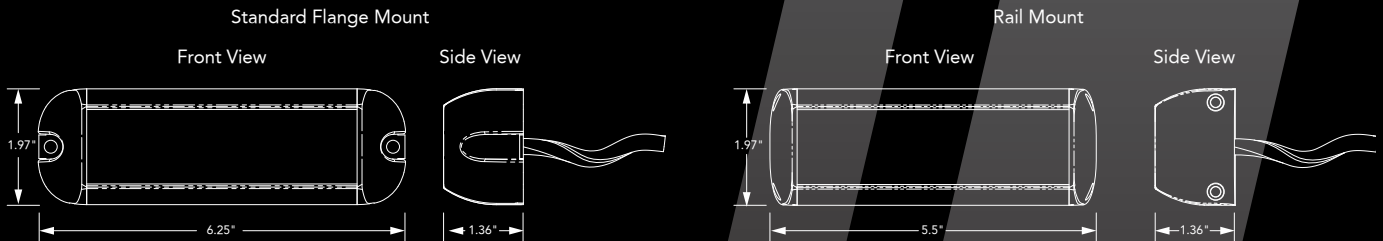

## Ordering Information

Please specify lens colors and model number when ordering. Available clear lens LED colors are amber, blue, red and white. Colored lenses available in amber, blue and red.

### Aluminum Finish

#### Model No.

RECT25LSHP  
RECT25LSSD  
RECT25SLC  
RECT25CLSHP  
RECT25CLSSD  
RECT25CLSLC  
RECT25LSRHP  
RECT25LSRSD  
RECT25LSRLC  
RECT25CLSRHP  
RECT25CLSRSD  
RECT25CLSRLC

### Black Finish

#### Model No.

RECT25LSHPB  
RECT25LSSDB  
RECT25SLC  
RECT25CLSHPB  
RECT25CLSSDB  
RECT25CLSLC  
RECT25LSRHPB  
RECT25LSRSD  
RECT25LSRLC  
RECT25CLSRHPB  
RECT25CLSRSD  
RECT25CLSRLC

#### Description

12-LED High power iLED<sup>TM</sup>, clear lens, standard flange mount  
9-LED Standard power iLED<sup>TM</sup>, clear lens, standard flange mount  
6-LED Low current iLED<sup>TM</sup>, clear lens, standard flange mount  
12-LED High power iLED<sup>TM</sup>, colored lens, standard flange mount  
9-LED Standard power iLED<sup>TM</sup>, colored lens, standard flange mount  
6-LED Low current iLED<sup>TM</sup>, colored lens, standard flange mount  
12-LED High power iLED<sup>TM</sup>, clear lens, rail mount  
9-LED Standard power iLED<sup>TM</sup>, clear lens, rail mount  
6-LED Low current iLED<sup>TM</sup>, clear lens, rail mount  
12-LED High power iLED<sup>TM</sup>, colored lens, rail mount  
9-LED Standard power iLED<sup>TM</sup>, colored lens, rail mount  
6-LED Low current iLED<sup>TM</sup>, colored lens, rail mount

## Specifications

| Item                  | Description  |
|-----------------------|--|
| Size (standard mount) | 6.25" wide x 1.97" high x 1.36" deep (158.8mm x 50mm x 34.5mm)           |
| Size (rail mount)     | 5.5" wide x 1.97" high x 1.36" deep (139.7mm x 50mm x 34.5mm)            |
| Current Draw          | 12 LED unit: 1.6A avg.<br>9 LED unit: 1.2A avg.<br>6 LED unit: 0.8A avg. |
| Operating Temperature | -40°C - +65°C  |

**TOMAR** Electronics, Inc.  
*Clearing the Way*

[www.tomar.com](http://www.tomar.com)