


## 940 SERIES

### Digital Control Panel and Siren Amplifier

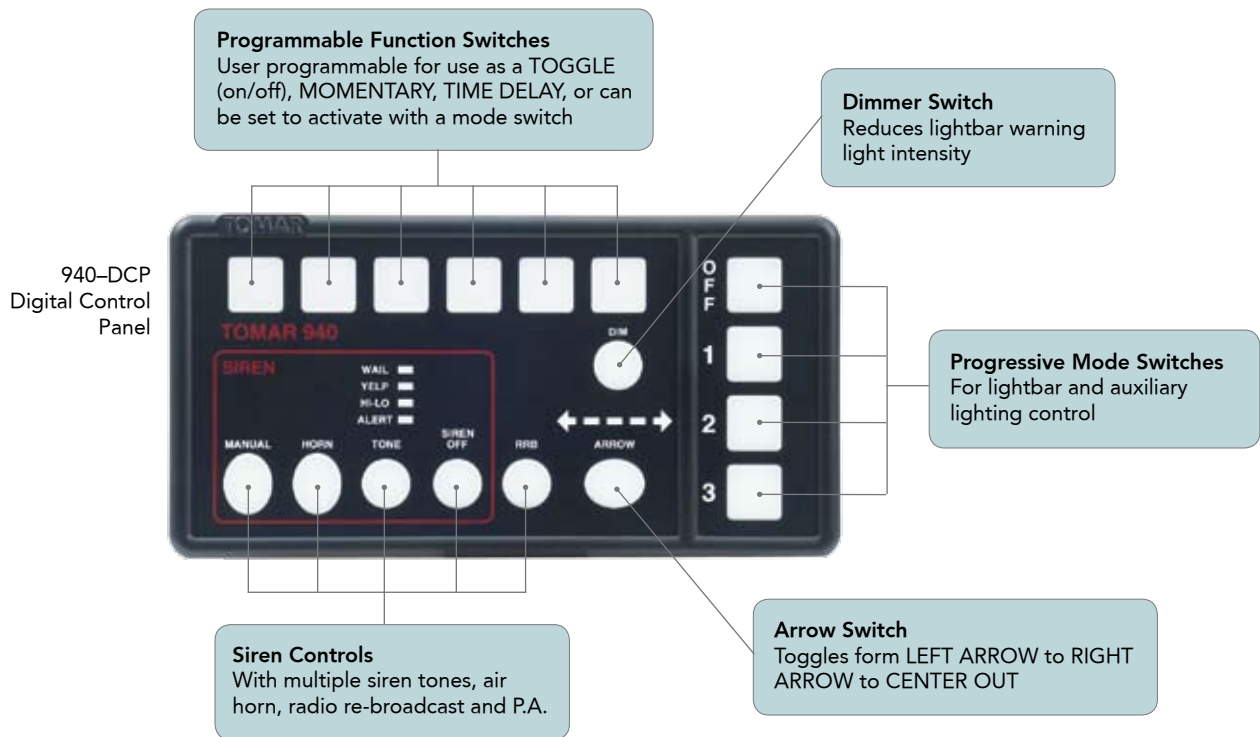

#### 940-DCP Digital Control Panel

The 940-DCP features six programmable function switches, integrated siren controls and four progressive mode switches allowing Jump To Mode™ activation as well as a traffic direction switch for use with TOMAR LED or NEOBE® lightbars equipped with the traffic direction option. The 940-DCP is backlit with LED indicators for easy identification and features a spill resistant housing. Connections are made via a simple RJ45 connection to the lightbar or 940 Siren Amp. All switches are a durable magnetic touch pad rated for 10 million operations.



#### 940-SIREN Control Panel and Siren Amplifier

The 940-SIREN combines the 940-DCP Digital Control Panel and the 940-AMP Siren Amplifier into a single unit for simplified installation.

# 940 SERIES DIGITAL CONTROL PANEL/SIREN AMPLIFIER

940-AMP  
Siren Amplifier

Microphone connection



RJ45 connections to lightbar and control panel

Function/Mode terminals

Power connections



( installed view )

## 940-AMP Siren Amplifier

The 940-AMP features 200 watt maximum load with one or two drivers, auxiliary connections for Horn Ring, Horn Relay, Air Horn, Park Kill and Alarm, seven selectable siren tones and a simple RJ45 connection to lightbar or 940-DCP.

## Ordering Information

Model No.	Description
940-AMP	Siren amplifier
940L-DCP	Digital control panel for use with 930L and 930NL series lightbars
940N-DCP	Digital control panel for use with 930N and 930NH series lightbars
940L-SIREN	Digital control panel and siren amplifier mounted together as a single unit. For use with 930L and 930NL series lightbars.
940N-SIREN	Digital control panel and siren amplifier mounted together as a single unit. For use with 930N and 930NH series lightbars.
940L-SIREN-R	Digital control panel and siren amplifier shipped as separate pieces with 20' cables for remote mounting applications. For use with 930L and 930NL series lightbars.
940N-SIREN-R	Digital control panel and siren amplifier shipped as separate pieces with 20' cables for remote mounting applications. For use with 930N and 930NH series lightbars.
940-M3473	Hand held microphone for use with all 940 amplifier or siren systems. (This option is included when ordering either 940-AMP or 940-SIREN systems.)

## Specifications

Item	Description
Dimensions	7" x 3.6" x 0.9" x 0.65 lbs ( 178mm x 92mm x 22.86mm x 0.29kg ) model 940-DCP 7" x 3.6" x 5.9" x 4.35 lbs. ( 178mm x 92mm x 149.86mm x 1.97kg ) model 940-AMP 7" x 5.0" x 6.8" x 5.0 lbs. ( 178mm x 173mm x 172.72mm x 2.27kg ) model 940-SIREN